

**LANCETTE
POINTERS**



Lancette *Pointers*

Art.	DESCRIZIONE	PAG.
PL	Lancette con regolazione micrometrico-planetarie <i>Pointers with micrometric-planetary regulation</i>	4-01
LRTG	Lancette con frizione con taglio cacciavite <i>Adjustable pointers with screwdriver cut</i>	4-01
	Lancette per manometri <i>Pointers for pressure gauges</i>	4-02
	Lancette tipo UNI per manometri <i>UNI pointers for pressure gauges</i>	4-03
	Lancette per termometri <i>Pointers for thermometers</i>	4-04



Lancette regolabili

Adjustable pointers

Art. PL

Lancetta con regolazione micrometrica planetaria.

I dispositivi vengono montati :

Per il tipo M dal DN 180

Per il tipo ML dal DN 80

Disponibili con lancette in acciaio brunito o alluminio pre-verniciato nero.

Meccanismo in ottone nichelato o alluminio fori 0,8 – 1,1 – 1,2 mm

A richiesta con foro conico

Micrometric planetary regulation.

Devices are assembled as follows :

M type from diameter 180

ML type from diameter 80

Pointers are available in burnished steel or black pre-painted aluminium.

Mechanism in nichel-plated brass or aluminium with hole 0,8 – 1,1 – 1,2 mm

On request with conic hole



Art. LRTG

Lancette a frizione con taglio cacciavite.

Lancetta in acciaio brunito o alluminio pre-verniciato nero.

Virola in ottone nichelato o alluminio.

Disponibili dal diametro 50 al diametro 300

A richiesta con foro conico

Adjustable pointers with screwdriver cut.

Pointers are available in burnished steel or black pre-painted aluminium.

Ferrule in nichel-plated brass or aluminium

They are available from diameter 50 to diameter 300

On request with conic hole



Lancette per manometri

Pointers for pressure gauges



Art. ML

Lancette tipo americano, disponibili in acciaio brunito o alluminio pre-verniciato nero. Virola in ottone o alluminio, foro 0,9 / 1,2
A richiesta con fori speciali e per movimenti doppi

*American kind pointers, available in burnished steel or black pre-painted aluminium. Ferrule in brass or aluminium, hole 0,9 / 1,2.
On request, special holes and suitable for double movements*

TIPO RAGGIO/RADIUS

ML 60	22mm
ML 80	32mm
ML100	38mm
ML130	50mm
ML150	60mm
ML180	70mm

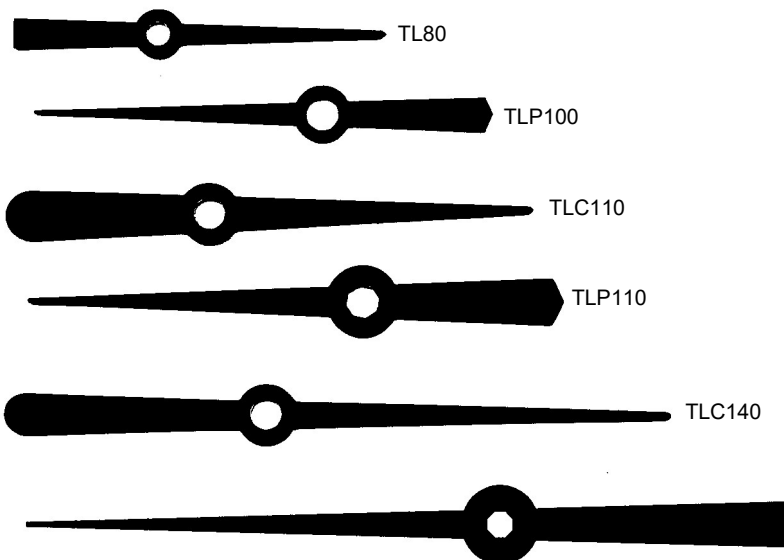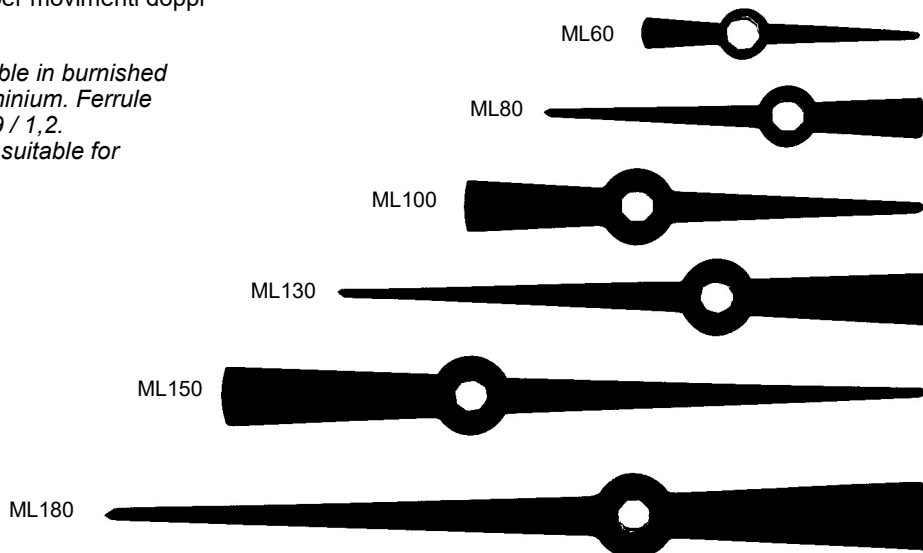

TIPO RAGGIO/RADIUS

TL80	30mm
TLP100	38mm
TLC110	42,5mm
TLP110	43mm
TLC140	53mm
TML150	60mm
TML160	62,5mm



Lancette per manometri (tipo UNI) Pointers for pressure gauges (kind UNI)


Art. M

Lancette tipo UNI, disponibili in acciaio brunito o alluminio pre-verniciato nero. Viro-
la in ottone o alluminio, foro 0,9 / 1,2. A richiesta con fori speciali e per movimenti
doppi.

*UNI kind pointers, available in burnished steel or black pre-painted aluminium.
Ferrule in brass or aluminium, hole 0,9 / 1,2. On request, special holes suitable
for double movements*

TIPO RAGGIO/RADIUS


M40	16mm
M50	20mm
M60	22mm
M70	26mm
M80	30mm
M100	38mm
M130	50mm
M150	60mm
M180	73mm
M200	84mm
M260	105mm
M300	130mm
M500	205mm

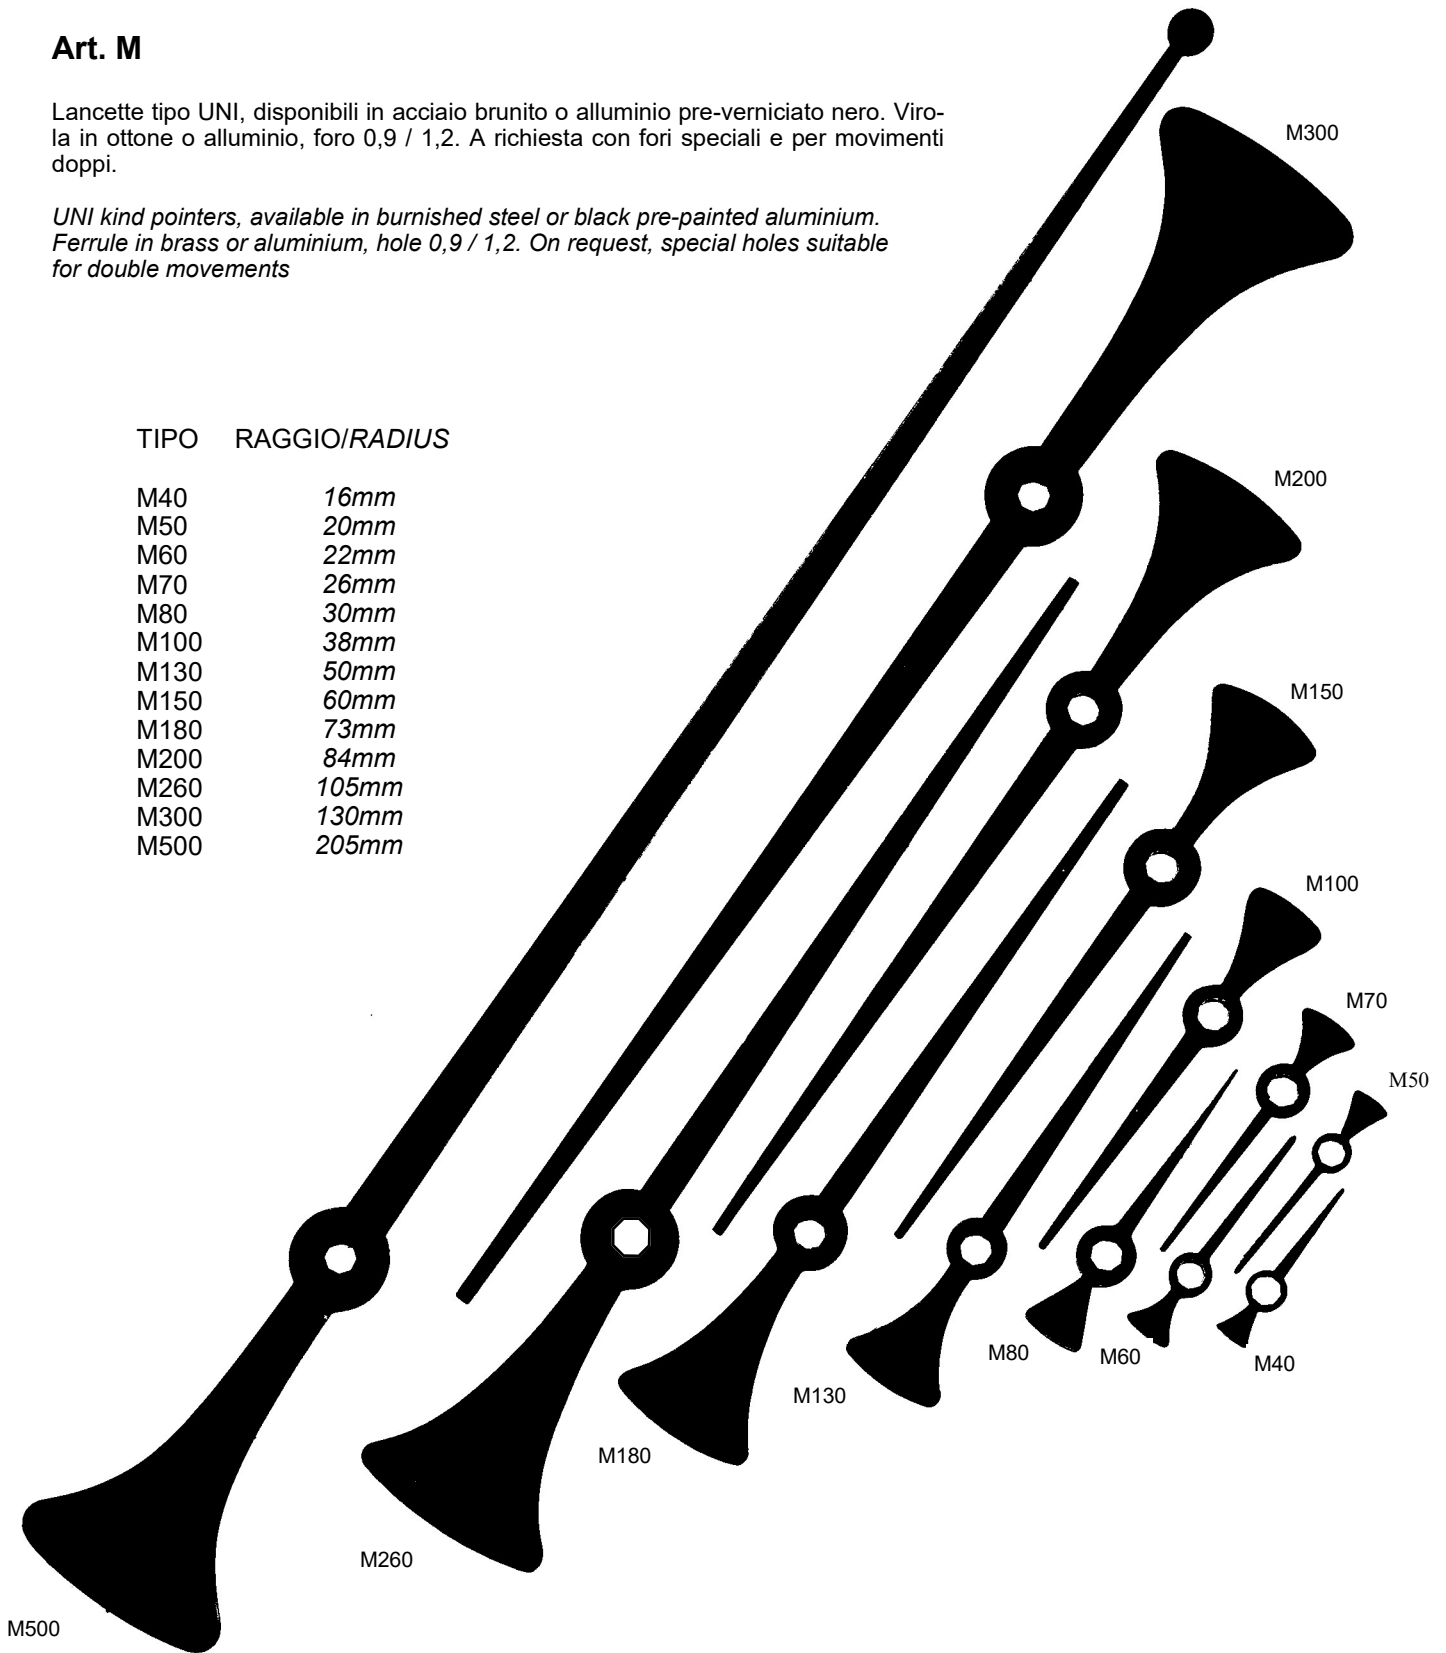

Lancette per termometri

Pointers for thermometers

TIPO	RAGGIO/RADIUS
TL40	16mm
TL50	20mm
TL60	22,5mm
TL70	25mm
TL100	49,5mm
TL160	62,5mm
TL150	70mm
TL300	129,5mm
TA80	31mm
TP60	19,5mm
IN100	40mm
IN130	47mm

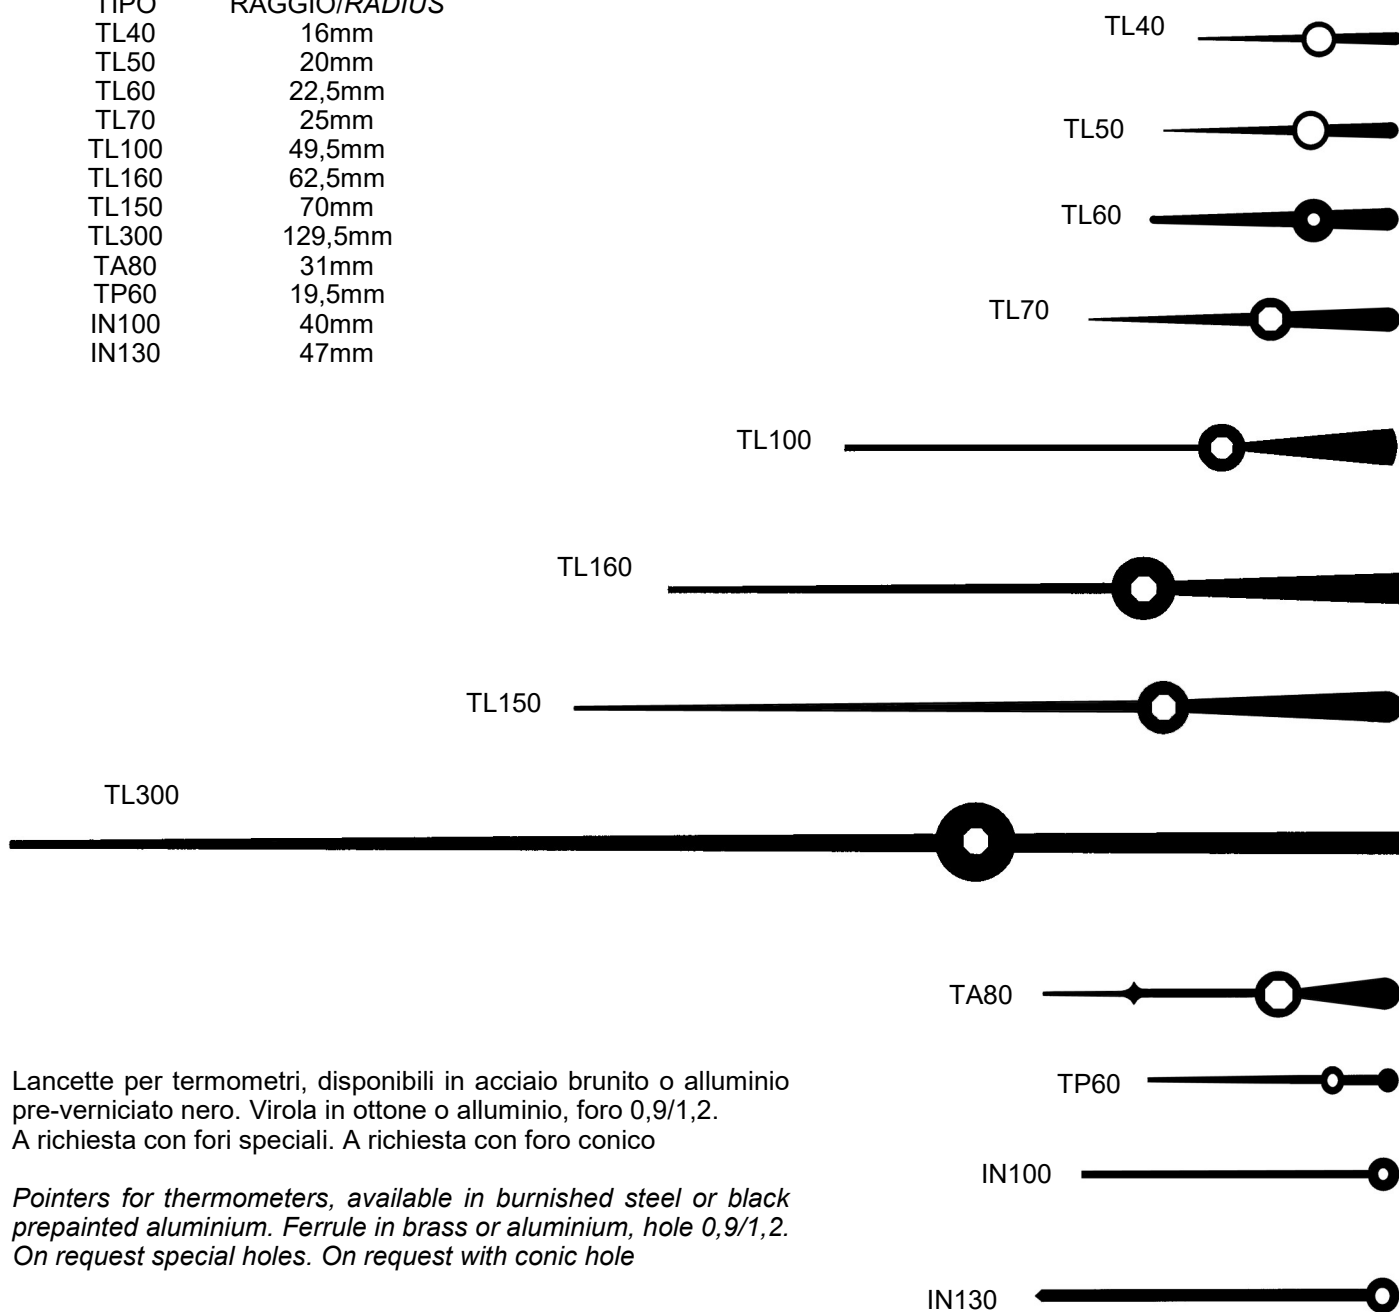

Lancette per termometri, disponibili in acciaio brunito o alluminio pre-verniciato nero. Virola in ottone o alluminio, foro 0,9/1,2. A richiesta con fori speciali. A richiesta con foro conico

Pointers for thermometers, available in burnished steel or black prepainted aluminium. Ferrule in brass or aluminium, hole 0,9/1,2. On request special holes. On request with conic hole

